

LQSC

◆ Parameters:

Input voltage: DC 5-35V

Bluetooth version: 4.2

Bluetooth name: LQSC_BT

Working temperature: -40°C to 85°C

Outer dimensions: 55*32*9mm (length*width*height, can be used in combination)

N.W:7g

1. Full Surface Mounted Technology
2. Wide range of operating voltage
3. Power supply reverse protection
4. Dual audio output terminals
5. Antenna external connection (suitable for mounting inside a metal box)


LED indicator instructions:

Quick flashing: waiting for a connection

Slow flashing: audio playing

Remain on: connected

◆ Module instructions:

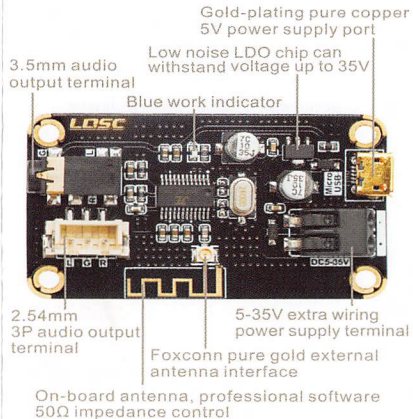

Bluetooth name: LQSC_BT

(Support memory connection)

Quick flashing: waiting for a connection


Slow flashing: audio playing

Remain on: connected

(Universal micro USB 5V power supply)



DC5-35V extra wiring power supply terminal

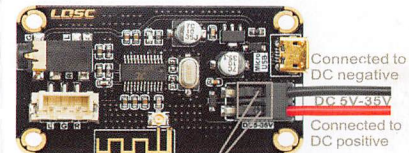

When connecting the wires, you need to press down to release the spring clips (same operation when disconnected)




LQSC

BT蓝牙模块V1.1
BT Bluetooth Module V1.1


◆ 产品特点:

输入电压: DC 5V-35V
蓝牙版本: 4.2
蓝牙名称: LQSC_BT
工作温度: -40°C到85°C
外围尺寸: 55*32*9(长*宽*高)(mm),可组合使用
产品净重: 7g
全贴片工艺
宽范围工作电压
电源接反保护
双音频输出端子
可外接天线(适用于安装在金属盒子里面)
LED指示灯说明
快闪: 等待连接
慢闪: 音频播放中
常亮: 已连接


◆ 产品说明图:

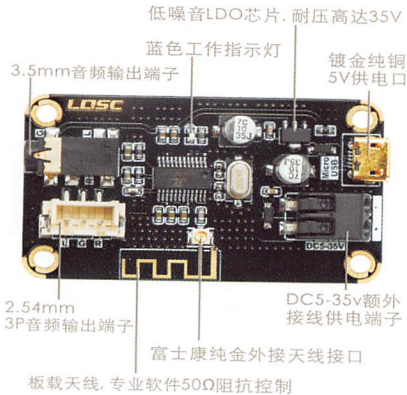

蓝牙名称: LQSC_BT (支持记忆连接)
快闪: 等待连接
慢闪: 音频播放中
常亮: 已链接
(通用Micro USB 5V供电)



DC5-35V 额外接线供电端子

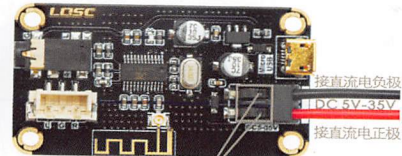

接换导体时需向下轻按以松开弹簧片